

Are ideal for use in various architectural environments such as auto dealerships, parking lots, walkways, roadways, campuses, facade lighting, grocery stores and other public areas.



## MOUNTING

- Standard versatile mounting arm accommodates multiple drilling patterns as well as square and round poles
- Wall Mount available for direct wall mounting and J-box mounting
- Optional for die-cast aluminum slipfitter mounting adapter

### Mounting Options




**Arm Mount ( Square or Round poles)**  
Standard versatile mounting arm is simple to install and can be used with existing poles for retrofit installations.



**Slipfitter Mount**  
An optional cast aluminum mast arm adapter secures fixture head to nominal 2"(2-3/8"O.D. pipe size) horizontal steel tenon arm.



**Wall Mount**  
Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting

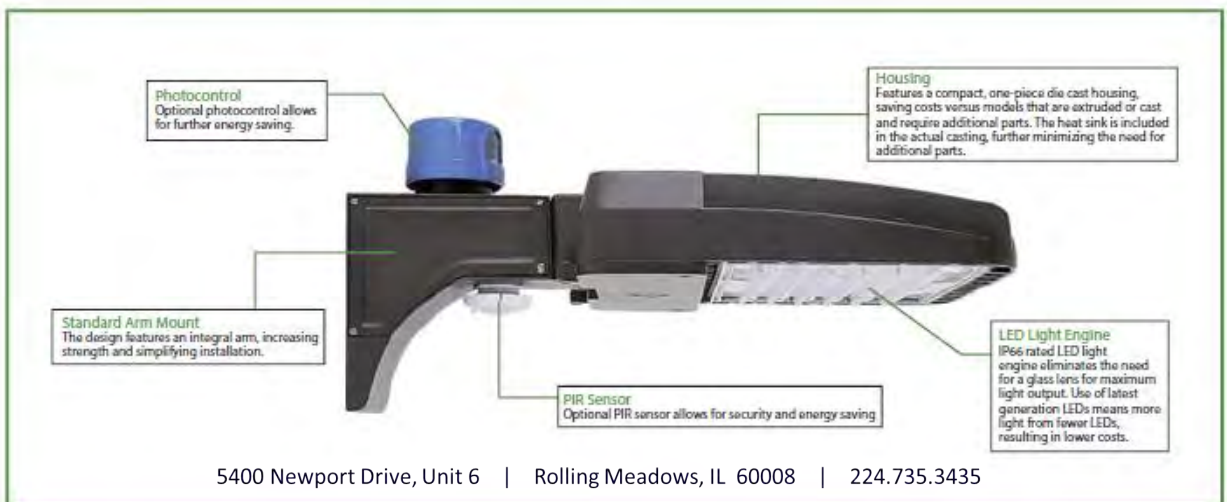

# Additional Mounting Accessories

## INSTALLATION KIT



### Slipfitter Installation kit

NO. SPFD04DA

Finish: Dark Bronze

USE: For pole mounting. Aluminum mast arm adapter secures fixture head to nominal 2"(2-3/8"O.D. pipe size) horizontal steel tenon arm. Furnished with two 1/2" hex head stainless-steel screw.




### Square Poles Installation kit

NO. SQAL01DA-A

Finish: Dark Bronze

USE: Standard versatile mounting arm for area light application, with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts and two 1/2" hex head stainless-steel screw. Suitable for 4" & 5" square pole.



### Round Poles Installation kit

NO. SQAL01DA

Finish: Dark Bronze

USE: Standard versatile mounting arm for area light application, with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts and two 1/2" hex head stainless-steel screw. Suitable for 4" & 5" round Poles.




### Yoke Installation kit

NO. YKFD04DA

Finish: Dark Bronze

USE: The yoke mount attaches an area light (70W/105W/150W/ 200W) to almost any surface: wall, roof, or wood pole. It can be used with our 2-3 / 8 "O.D. Tenon mounting bracket (SP-TR-D) to install.



### 250W Trunnion Installation kit

NO. TRFD04DA

Finish: Dark Bronze

USE: The trunnion mount attaches an area light (250W/300W) to almost any surface: wall, roof, or wood pole. It can be used with our 2-3 / 8 "O.D. Tenon mounting bracket (SP-TR-D) to install.



### Wall Mount Installation kit

NO. WMAL01DA

Finish: Dark Bronze

USE: Wall Mount is easy to install for direct wall mounting with 1/2' conduit wiring or standard J-box mounting, and with K/O to install Photocell or sensor. Furnished with two 5/16" hex head stainless-steel bolts.

## POLE BRACKET · For mounting one fixture on an existing pole



### 4" Square Pole Mount with 2-3/8" O.D. Tenon

No. 4SQ-SP-D

Finish: Dark Bronze

USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



### 5" Square Pole Mount with 2-3/8" O.D. Tenon

No. 5SQ-SP-D

Finish: Dark Bronze

USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



### 4" Round Pole Mount with 2-3/8" O.D. Tenon

NO. 4SQR-SP-D

Finish: Dark Bronze

USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



### 5" Round Pole Mount with 2-3/8" O.D. Tenon

NO. 5SQR-SP-D

Finish: Dark Bronze

USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.



### 2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures

NO. SP-TR-D

Finish: Dark Bronze

USE: The 2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures is designed to mount our area light fixtures that are equipped with a yoke mount onto a 2-3/8" OD tenon.

## WALL BRACKET

- Attaches to any flat surface
- Provides wiring access




### 90° Wall Mount Bracket with 2-3/8" O.D. Tenon

NO. WM-SP-D

Finish: Dark Bronze

USE: The 90° wall mount bracket with 2-3/8" tenon attaches an area light to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slipfitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.



**2-3/8" OD Horizontal Tenon Mid-Pole Bracket**

NO. SQ-SP-D

Finish:Dark Bronze

USE:2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with a adjustable slipfitter onto a 2-3/8" OD horizontal tenon

**Round External Mount Horizontal Tenon · To mount 2/3/4 fixtures on a existing pole**



**Double 90° Horizontal Tenon Adaptor**

NO. R60-SP2-90-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



**Double 180° Horizontal Tenon Adaptor**

NO. R60-SP2-180-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



**Triple 90° Horizontal Tenon Adaptor**

NO. R60-SP3-90-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



**Triple 120° Horizontal Tenon Adaptor**

NO. R60-SP3-120-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally



**Quad 90° Horizontal Tenon Adaptor**

NO. R60-SP4-90-D

Finish:Dark Bronze

USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally