



emium™

emium lighting, see differently

INTERIOR LIGHTING



Edge-lit LED Smooth Panel Light
Wattage & Color Temperature Selectable

5 Year Full Product Warranty



FEATURES

Beautiful, modern designed panel light fixtures for use in drop ceiling applications.

Ideal for commercial buildings, hotels, offices, galleries, retail stores, plazas, supermarkets, etc.


Panels are available in three size dimensions for direct retrofit replacement of fluorescent fixtures.

Comes standard with dimmable driver (0-10V dimming protocol) and four lumen output levels and light color selections.

Provides uniform light distribution without hot spots, flicker or glare.

- Edge-lit LED array with translucent diffuser provides uniform illumination
- Ultra-slim Aluminum Frame <0.5"
- 4 Installer selectable watt levels: 20W-50W
- 4 Installer selectable CCT levels: 3K-5K
- External UL Listed Class-2 Constant Current Driver
- Suitable for damp locations
- Minimize labor and recycling costs
- Ease of installation and maintenance
- 0-10V dimming
- 5 Year Manufacturer's Warranty
- Emergency Battery option available
- Super slim design makes installation fast and simple
- Optional lighting controls (motion and light sensors and emergency backup battery provide protection and conserve energy
- >50,000 Hour Life Rating

DIMENSIONS

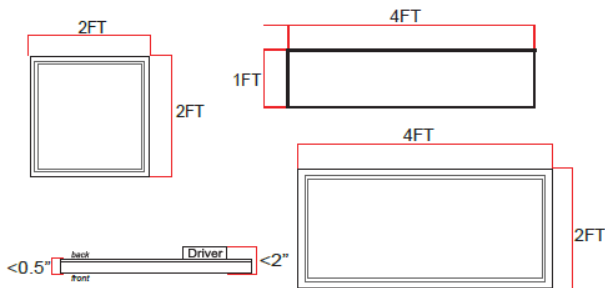

for more information email info@emium.com or call 224.735.3435 | www.emium.com

INTERIOR LIGHTING

Ordering Guide: Edge-lit LED Panels: Example: EL-ZY-PNL-2X2-40W-DM

Fixture Type	Size	Wattage	CCT (X,X00) Kelvin	Dimmable	
EL-ZY-PNL			N/A	DM	
EL-ZY-PNL Edge-lit LED Panel Series	1X4 2X2 2X4	For 1x4 panels use 40W designation For 2x2 panels use 40W designation For 2x4 panels use 50W designation <i>Panels come with wattage selectable dip-switches.</i>	Dip-switch selectable. <i>No need to specify</i>	YES (0-10V)	NOTE: Please confirm the Emergency Backup option if needed.

SPECIFICATIONS

Model	EL-ZY-PNL-1x4-40W	EL-ZY-PNL-2x2-40W	EL-ZY-PNL-2x4-50W
Panel Size	1' x 4'	2' x 2'	2' x 4'
Power	20W, 30W, 36W, 40W (Selectable)		20W, 30W, 40W, 50W (Selectable)
Lumen Output	125lm/watt		
Color Temp	3000K, 3500K, 4000K, 5000K (Installer Selectable)		
Beam Angle	120°		
Input Voltage	100 - 277VAC		
CRI	> 80 Ra		
Emergency Backup	YES, Optional		
Dimmable	YES (0-10V)		
Rated Life	> 50,000 hrs.		

