

There is a Better Way

LED Plug-in Bulbs

Standard Series



WHY UPGRADE WITH EMIUM'S LED PLUG-IN BULBS?

This Emium LED Plug-in Bulb is available in a variety of sizes, lumen output levels, and color temperatures to suit any application.

These type of bulbs are engineered to install into existing infrastructure and fixtures, making the transition from fluorescent simple and cost-effective.

Options include configurations that are compatible with existing ballasts or can operate on 120-277VAC direct line voltage.

FEATURES

- Reduce energy consumption and operating costs by more than 60% or more
- Maintenance free operation - lasts up to 10 to 20 times longer than conventional lighting
- Cool beam - No UV or IR, reduces air conditioning
- Models available for both vertical and horizontal mounting applications
- Environmentally friendly - fully recyclable, no mercury or other hazardous material
- Estimated 50,000 hour LED Lifespan

Recommended Use:

- Commercial buildings
- Hotels
- Offices
- Retail Stores
- Plazas

LED Plug-in Bulbs

Standard Series

Vertical

12W



12 watts

- Base Type: G24q/GX24q
- 100-277VAC
- 91 lm/W
- 3000K, 3500K, 4000K, or 5000K
- Beam Angle : 140 °

Power Input:
Type AB-Dual Mode

EX: EL-VL-PLV-12WAGX24q-35

Stick

5W



5 watts

- Base Type: GX23/G23, E26, G24
- 120-277VAC
- 100 lm/W
- 3000K, 3500K, 4000K, or 5000K
- Beam Angle : 360 °

Power Input:
Type B-Direct Wire

EX: EL-VL-PLS-5WBGX23-50

7W



7 watts

- Base Type: GX23/G23, E26, G24
- 120-277VAC
- 100 lm/W
- 3000K, 3500K, 4000K, or 5000K
- Beam Angle : 360 °

Power Input:
Type B-Direct Wire

EX: EL-VL-PLS-7WBE26-40

Horizontal

5W



5 watts

- Base Type: G24q/GX24q
- 120-277VAC
- 100 lm/W
- 3000K, 3500K, 4000K, or 5000K
- Beam Angle : 140 °

Power Input:
Type B-Direct Wire

EX: EL-VL-PLH-5WBGU24-27

7W



7 watts

- Base Type: G24q/GX24q
- 120-277VAC
- 100 lm/W
- 3000K, 3500K, 4000K, or 5000K
- Beam Angle : 140 °

Power Input:
Type B-Direct Wire

EX: EL-VL-PLH-7WB-G24d-30

12W



12 watts

- Base Type: G24q/GX24q
- 120-277VAC
- 91 lm/W
- 3000K, 3500K, 4000K, or 5000K
- Beam Angle : 140 °

Power Input:
Type A/B - Dual Mode

EX: EL-VL-PLH-12WBG23-35

*See below for Dimensions




LED Plug-in Bulbs : Dimensions

Standard Series

Vertical


Base Option

Extension Adopter

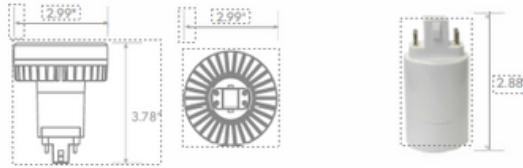

Stick

Base Option

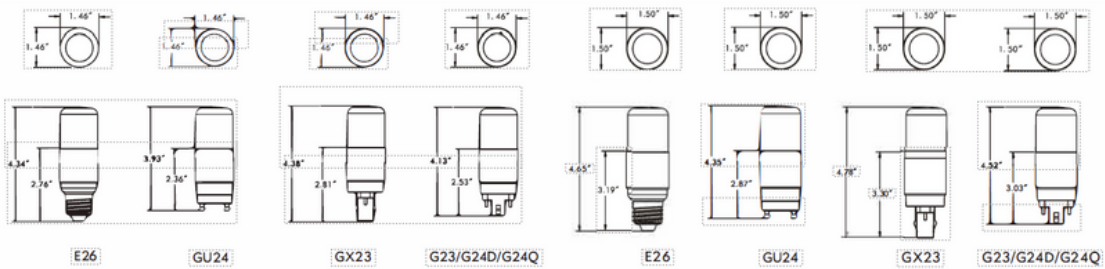

Horizontal

Base Option

